

# DRYCONN<sup>®</sup>

## WATERPROOF CONNECTORS

Great for use with low voltage lighting and direct bury applications



### Installation Instructions:

**IMPORTANT:** Turn off power before installing or removing connector. Product to be used in accordance with local and national codes.

1. Insert conductors through ports in base of body.
2. Strip conductors.
3. Align any frayed strands or conductors, twist stripped conductors together, and insert into crimp sleeve.
4. Using an indent type crimping tool, crimp sleeve and trim excess bare wire.
5. Fill plug with 20248 sealant (sold separately).
6. Push conductors fully into plug.
7. Insert plug into body until it snaps in place.

Do not reuse

### Dry-Crimp Connectors


Catalog #	Selling Unit
20240 Non-Filled Connectors	Bag of 25*
20248 Silicone Sealant	1 Tube
20249 Replacement Crimp Sleeves	Bag of 50 (25 small, 25 large)

### PRODUCT SPECIFICATIONS AND MEASUREMENTS

Product Specification  
 Max. Voltage: 50V  
 Connector Size: 0.90" (22.9mm) x 1.45" (36.8mm)  
 Wire Type: Copper  
 Wire Range: Min #18 / Max #10

### MEASUREMENTS

A - 0.90"      B - 1.45"

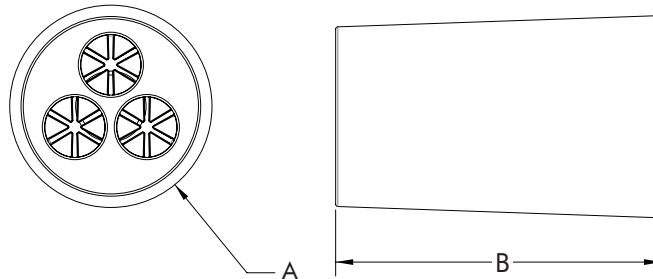

### CONSTRUCTION

Housing and Insert - High impact polypropylene  
 Crimp - Copper

\* Contents include 25 Non-filled housings, 25 small and 25 large copper crimp sleeves

All U.S. trademarks apply. All Rights Reserved.

Copper Crimps are UL Listed.

**KING**  
INNOVATION<sup>®</sup>

50100-85 REV A 04/13



www.kinginnovation.com  
 (P) 800.633.0232  
 (F) 636.519.5410

# DRYCONN®

## WATERPROOF CONNECTORS

Great for use with low voltage lighting and direct bury applications



### Installation Instructions:

**IMPORTANT:** Turn off power before installing or removing connector. Product to be used in accordance with local and national codes.

1. Insert conductors through ports in base of body.
2. Strip conductors.
3. Align any frayed strands or conductors, twist stripped conductors together, and insert into crimp sleeve.
4. Using an indent type crimping tool, crimp sleeve and trim excess bare wire.
5. Push conductors fully into plug.
6. Insert plug into body until it snaps in place.

Do not reuse

### Dry-Crimp Connector (Pre-Filled)


Catalog #	Selling Unit
20245 Pre-Filled Connectors	Bag of 25*
20249 Replacement Crimp Sleeves	Bag of 50 (25 small, 25 large)

### PRODUCT SPECIFICATIONS AND MEASUREMENTS

Product Specification  
 Max. Voltage: 50V  
 Connector Size: 0.90" (22.9mm) x 1.45" (36.8mm)  
 Wire Type: Copper  
 Wire Range: Min #18 / Max #10  
 Silicone Sealant Temperature: -45°F (-43°C) to 400°F (200°C)

### MEASUREMENTS

A - 0.90"      B - 1.45"

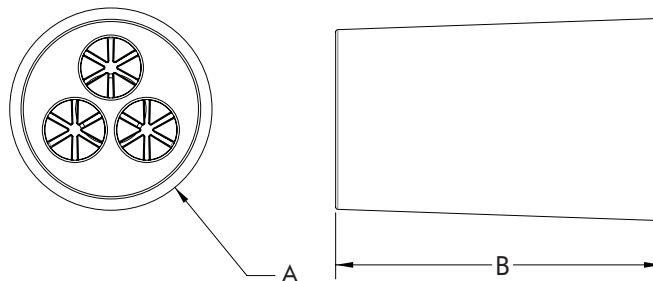

### CONSTRUCTION

Housing and Insert - High impact polypropylene  
 Crimp - Copper  
 Sealant - Non-hardening viscous dielectric silicone

\* Contents include 25 Pre-filled housings, 25 small and 25 large copper crimp sleeves

All U.S. trademarks apply. All Rights Reserved.

Copper Crimps are UL Listed.

**KING**  
INNOVATION®



Made in USA of US  
and foreign parts

50100-85 REV A 04/13

www.kinginnovation.com  
 (P) 800.633.0232  
 (F) 636.519.5410