


TreeLight Mount™

Great for creating a downlight effect in trees

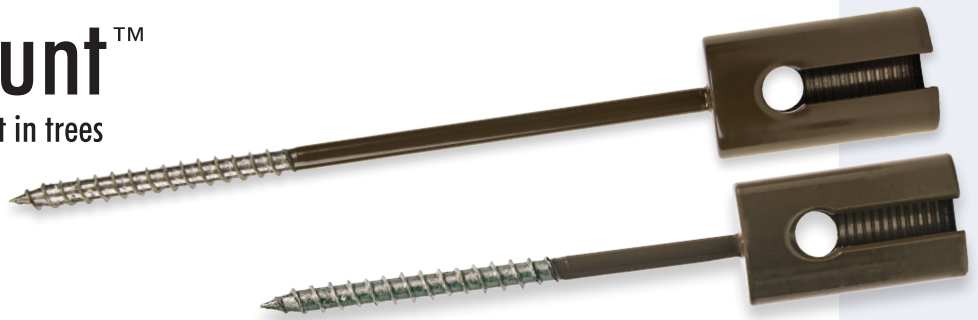

INSTALLATION INSTRUCTIONS

1. Using a 5/16" hex drive socket, drive TreeLight Mount into tree until threaded/uncoated area is no longer visible.
2. Thread preferred landscape light fixture to tree mount.
3. Affix cord to tree using desired method.

FEATURES AND BENEFITS

- Mount most landscape lighting fixture brands to trees for a downlight effect
- Landscape lighting fixture attaches to a 1/2" NPT threaded female fitting
- Internal 5/16" hex head allows for fast installation with drill and nut driver bit
- 100% stainless steel with bronze powder coat finish
- 3.5" stand-off bolt accommodates for many years of tree growth
- Eco-friendly design will not damage trees
- Lasts as long as the LED light you are installing
- No yearly maintenance
- Mono (single point) installation makes the TreeLight less likely to infect a tree
- Pass through slot accommodates prewired fixtures

U.S. Pat. 8,967,564 B2 and additional Patents Pending apply. All other trademarks, U.S. and Foreign Patents apply. All Rights Reserved.

TreeLight Mount

Catalog #	Description	Selling Unit
25110	7" TreeLight Mount	1 Mount
25114	4" TreeLight Mount	1 Mount

PRODUCT SPECIFICATIONS FOR 25110 & 25114

- Install requires 5/16" hex drive
- Socket threading: 1/2" NPT
- 100% stainless steel
- Bronze powder coat finish

#25110 MEASUREMENTS (IN.):

- Total Part Length: (A) 7.50"
- Total Screw Length: (B) 5.75"
- Socket Diameter: (C) 1"
- Socket Length: (D) 1.75"
- Thread Length: (E) 2.25"
- Unthreaded Length: (F) 3.5"

#25114 MEASUREMENTS (IN.):

- Total Part Length: (A) 5.6"
- Total Screw Length: (B) 3.8"
- Socket Diameter: (C) 1"
- Socket Length: (D) 1.75"
- Thread Length: (E) 2.4"
- Unthreaded Length: (F) 1.4"

