


For 80 and 100 lb. 1" 3408 / 3608 HDPE Pipe For 100 and 125 lb. 1" 4710 HDPE Pipe

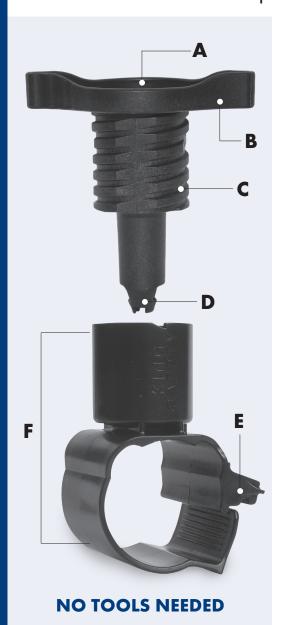

#1 IN SPEED, COMFORT AND DURABILITY.

FOR SWING JOINTS, DRAINS, AND SPRINKLER HEADS

SnapTap® Saddles w/FPT Tap

SKU#	Size	Selling Unit
22310	1" Saddle w/ 1/2" FPT Tap	Bag of 25



SnapTap Saddles w/90° Elbow

SKU#	Size	Selling Unit
22315	1" Saddle w/ 90° Elbow	Bag of 25



SnapTap Saddles w/Straight Barb

SKU#	Size	Selling Unit
22320	1" Saddle w/ Straight Barb	Bag of 25



A. VERSATILE TAP DESIGN

Tap is threaded to handle 90° Elbow, Straight Barb, or appropriate sprinkler heads.

B. ERGONOMIC HURRICANE HANDLE

With **50% MORE SURFACE AREA** to cushion fingers and provide maximum comfort.

C. FAST THREAD

Short thread design allows for the quickest and easiest installation possible.

D. IMPROVED CUTTING TIP

Superior strength patented "cutting tip" cleanly cuts polyethylene pipe for a tight seal every time.

E. SIDE SNAP LATCH

Side location for visible, secure connection.

F. WORKING HEIGHT

Shorter working height than competitive products, requires less digging.





For 80 and 100 lb. 1" 3408 / 3608 HDPE Pipe For 100 and 125 lb. 1" 4710 HDPE Pipe

SnapTap® Saddles

Installation Instructions

Note: Do not install tap into saddle until saddle is in place on pipe.



SLIP saddle onto pipe BEFORE LATCHING.



SNAP the latch into place until snug with pipe.



Screw **TAP** into saddle until the tap locks. Handle will be parallel to pipe.

NOTE: To reposition SnapTap Elbow, turn clockwise only.

Releasing an Engaged Latch

Should the latch become partially engaged it is possible to release by gripping the saddle with both hands as illustrated below. Slowly pull the saddle apart with a twisting motion to release the latch.





MADE IN U.S.A.

50100-28 REVJ 06/23

U.S. Patent 6,510,865 and 6,767,033.
All other trademarks, U.S. and Foreign
Patents Pending apply. All Rights Reserved.
©2017 King Innovation®, O'Fallon, MO 63366