



DryConn Waterproof Connectors

Filled Connectors for Direct Bury Use

INSTALLATION INSTRUCTIONS

Important: Turn off power before installing or removing connector. Product to be used in accordance with local and national codes.

1. Strip wires 5/8 in (15.9 mm).
2. Align any frayed strands or conductors.
3. Pre-twisting unnecessary. Place stripped wires together with ends of insulation even.
4. Twist connector onto wires, pushing firmly until hand-tight. Do not over torque.
5. Wipe sealant in and around conductors and connector opening while tightening. Do not reuse.




Measurements:

A – 2 in (50.8 mm)

B – 0.81 in (20.5 mm)

C – 0.62 in (15.7 mm)

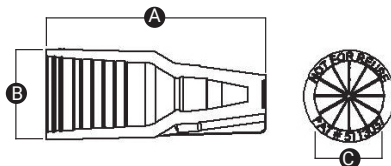

UL Listed as a Sealed Wire Connector. For use in dry, damp, wet locations below or above grade when used in an enclosure. *For use in direct bury applications when operating at 30 volts or less.

USA

Tel 800.624.4320
info@nVent.com

Our powerful portfolio of retail brands:

CADDY ERICO GARDNER BENDER KING INNOVATION



LARGE DIRECT BURY WATERPROOF CONNECTORS

Catalog #	Selling Unit
10600	Card of 2
10666	Bag of 10
10670	Box of 100

PRODUCT SPECIFICATIONS AND MEASUREMENTS

Max. Voltage:	600 V max. building wire (1000 V max. signs or luminaires)
Connector Size:	2 in x 13/16 in (50.8 mm x 20.6 mm)
Wire Type:	Copper/Copper
Wire Range:	Min #22/Max #8
Temperature Rating:	221° F (105° C)
UL Designation:	MDB

NEC REQUIRED FOR OUTDOOR CONNECTIONS

Selected 600 V Wire Combinations

For use with solid and/or stranded combinations.

1-3 #10	1 #10 w/1-3 #14	1 #14 w/3-4 #18
1-4 #12	1 #10 w/1-5 #16	2 #14 w/2-4 #16
2-5 #14	1 #12 w/1-4 #14 or #16	1 #8 w/1 #12
4-6 #16	1 #12 w/2-4 #18	5 #14 w/1 #18
3 #14 w/1-2 #16, #18, #20 or #22	2 #12 w/1-2 #14, #16 or #18	1 #8 w/1-2 #16, #18, #20 or #22
3 #12 w/1 #14		

Contact factory for a complete list of wire combinations.

