nVent | KING INNOVATION


We connect and protect

Blazing Snaploc


Filled Connectors for Outdoor/Electrical Use

INSTALLATION INSTRUCTIONS


Important: Turn off power before installing or removing connector. Product to be used in accordance with local and national codes.



1. Rotate wings fully apart beyond 90 degrees.



2. Insert unstripped wires into holes. Push wires to back of the connector (wire ends should be visible through clear back of connector).



3. Hold wires in place while squeezing handles together until the connector snaps shut.

Selected 30 V Wire Combinations

For use with solid and/or stranded combinations.

2–3 #18 or #16

U.S. Pat. 7,335,050, D575,738, D575,230, and other patents pending.



BVS1 WATERPROOF CONNECTORS

SKU #	Selling Unit
BVS1	Bag of 25

PRODUCT SPECIFICATIONS AND MEASUREMENTS


Max. Voltage:	30 V Max. building wire
Connector Size:	1.460 in x 1.04 in (37 mm x 26.4 mm)
Wire Type:	Copper/Copper
Wire Range:	#18 SOL/STR
Temperature Rating:	221°F (105°C)

Measurements:

A – 1.460 in (37 mm)

B – 1.040 in (26.4 mm)

C – 1.080 in (27.4 mm)

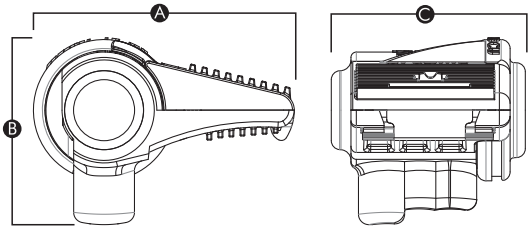

USA

Tel 800.624.4320

info@nVent.com

Our powerful portfolio of retail brands:

CADDY ERICO GARDNER BENDER KING INNOVATION

©2026 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without notice.