

DryConn Waterproof Connectors


For use with utility tracer lines

Important: Turn off power before installing or removing connector. Product to be used in accordance with local and national codes.

INSTALLATION INSTRUCTIONS

1. Assemble connection per split bolt manufacturer instructions.
2. Lay conductor and connector into housing, per Figure 1.
3. Close lid of housing, aligning conductors until housing lid is fully latched.
4. Do not reuse.

Figure 1

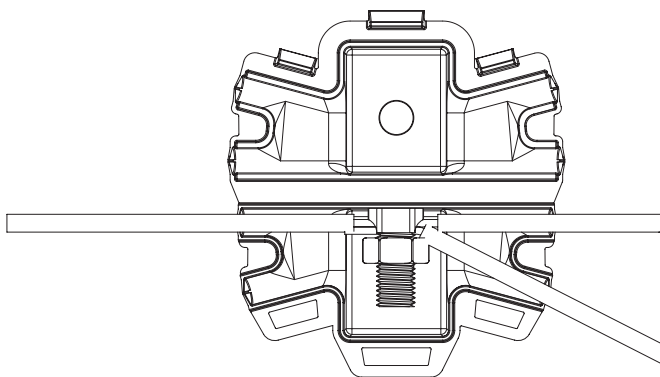

Note: Split bolt size not to exceed 1 in (25.4 mm) tall by 51/64 in (20.2 mm) wide by 45/64 in (17.8 mm) deep.

DRYCONN SPLIT BOLT HOUSING YELLOW

Catalog #	Selling Unit
69205	Bag of 10

PRODUCT SPECIFICATIONS & MEASUREMENTS



Max. Voltage: 50 V max.
 Connector Size: 1 19/32 in (40.6 mm) Height x 2 29/32 in (73.7 mm) Length x 1 in (25.4 mm) Width
 Wire Range: #14–10 Solid Copper; #14–10 Steel Core Tracer Wire
 Sealant Temperature Rating: –58°F to 392°F (–50°C to 200°C)

CONSTRUCTION

Housing: High impact polypropylene
 Sealant: Dielectric gel

MEASUREMENTS

A – 1 19/32 in (40.6 mm) B – 2 29/32 in (73.7 mm)
 C – 1 in (25.4 mm)

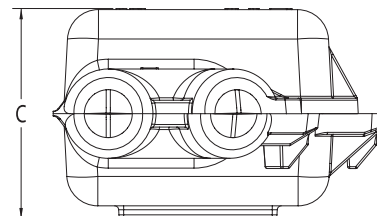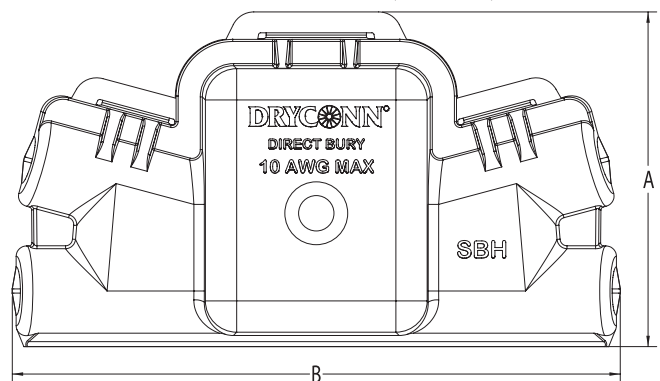

U.S. Pat. 7,950,956 and additional Patents Pending apply.
 All other trademarks, U.S. and Foreign Patents Pending apply. All Rights Reserved.

USA

Tel 800.624.4320
 info@nVent.com

Our powerful portfolio of retail brands:

CADDY ERICO GARDNER BENDER KING INNOVATION