
nVent KING INNOVATION

We connect and protect

DryConn Waterproof Connectors

For use with utility tracer lines

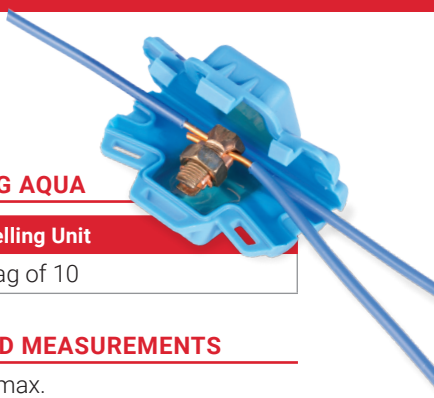

INSTALLATION INSTRUCTIONS

Important: Turn off power before installing or removing connector. Product to be used in accordance with local and national codes.

1. Assemble connection per split bolt manufacturer instructions.
2. Lay conductor and connector into housing, per Figure 1.
3. Close lid of housing, aligning conductors until housing lid is fully latched.
4. Do not reuse.

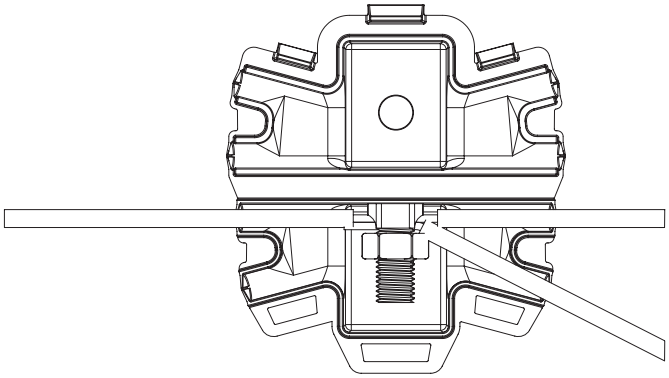


Figure 1

Note: Split bolt size not to exceed 1 in (25.4 mm) tall by 51/64 in (20.2 mm) wide by 45/64 in (17.8 mm) deep

U.S. Pat. 7,950,956 and additional Patents Pending apply. All other trademarks, U.S. and Foreign Patents Pending apply. All Rights Reserved.

DRYCONN SPLIT BOLT HOUSING AQUA

Catalog #	Selling Unit
69105	Bag of 10

PRODUCT SPECIFICATIONS AND MEASUREMENTS


Max. Voltage:	50 V max.
Connector Size:	1 19/32 in (40.6 mm) Height x 2 29/32 in (73.7 mm) Length x 1 in (25.4 mm) Width
Wire Range:	#14-10 Solid Copper; #14-10 Steel Core nVent TRACER Wire
Sealant Temperature Rating:	–58°F to 392°F (–50°C to 200°C)

CONSTRUCTION

Housing: High impact polypropylene
Sealant: Dielectric gel

MEASUREMENTS

A – 1 19/32 in (40.6 mm) B – 2 29/32 in (73.7 mm)
C – 1 in (25.4 mm)

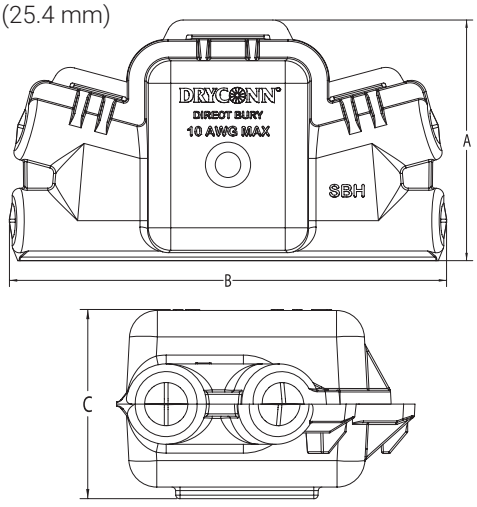

USA
Tel 800.624.4320
info@nVent.com

Our powerful portfolio of retail brands:

CADDY ERICO GARDNER BENDER KING INNOVATION

©2026 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without notice.