

DryConn Waterproof Connectors

Great for Low Voltage Irrigation Connections


INSTALLATION INSTRUCTIONS

Important: Turn off power before installing or removing connector. Product to be used in accordance with local and national codes.

1. Insert conductor into port, fully seating conductor into port. One conductor per port only.
2. Using hand tool, press cap fully into housing. The cap will be flush or slightly below the edge of the housing.
3. Wipe excess sealant in and around conductors and ports. Do not reuse.



To be sold only with installation instructions.

THREE WIRE CONNECTION



TWO WIRE CONNECTION

NOTE: When installing solid and stranded conductor, place stranded in center port.

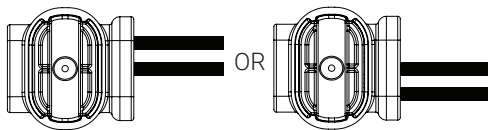

USA

Tel 800.624.4320
info@nVent.com

Our powerful portfolio of retail brands:

CADDY ERICO GARDNER BENDER KING INNOVATION



316 IR+

SKU#	Selling Unit
98230	Bag of 30

PRODUCT SPECIFICATIONS AND MEASUREMENTS

Max. Voltage:	600 V max. building wire (1000 V max. signs or luminaries)
Connector Size:	0.99 in x 0.95 in (25.1 mm x 24.1 mm)
Wire Type:	Copper/Copper (Solid/Stranded)
Wire Range:	Min #22/Max #14*
*Not for use with 3 #14 AWG	
Temperature Rating:	221°F (105°C)
Housing Construction:	Polycarbonate UV & Impact Resistant

Manufacturer approved for low voltage (30 V) wet, damp and direct bury applications

	Measurements	
	in	mm
A	0.99	25.1
B	0.95	24.1
C	0.51	13.0
D	0.16	4.06

Features and Benefits

- Insulation displacement connector.
- Don't have to strip wires.

U.S. Pat. 9,496,626 and additional Patents Pending apply.
All other trademarks, U.S. and Foreign Patents apply.
All Rights Reserved.

**DO NOT REUSE.
Made in USA**

